

Superior handling & storage solutions



Economic Multi Heights Solution





Economic and Long Lasting


DOLAU® ECOLINE

Available in three different volumes: 485, 590, and 650 Liter, the ECOLINE Series is specially designed for storing and transporting light products of large volume.


The relatively low weight of these boxes makes them exceptionally cost effective. DOLAV ECOLINE boxes are ideal for the storage of light weight products in different industries.

ECOLINE boxes incorporate our exclusive integral runners and anti-slip corners, ensuring safe and secure stacking with high confidence.

The EcoLine box pallet range offer an ideal solution for areas with narrow aisles and limited space and the option to add wheels offers greater mobility.



ECOLINE 485 Height 740mm




ECOLINE 590

Height 870mm



ECOLINE 650 Height 950mm

Special Features

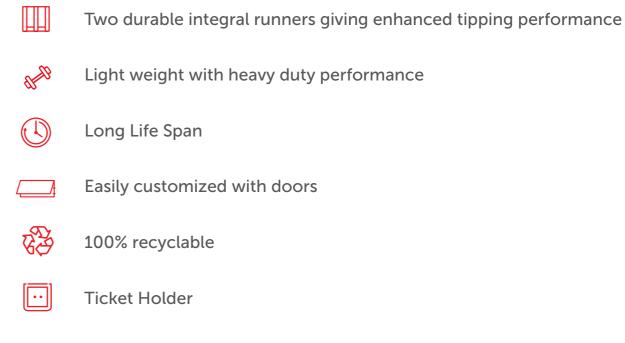

Available Options

Colours






AM

Antimicrobial Additive





Solid or Perforated Version



Special Location for RFID Tag



Available with Stackable Wheels







Hot stamped logo

Sequential numbering

Embossed logo



Tracking **Systems**

GPS tracking unit for global tracking



RFID

Smarter and efficient stock management



Logo options


Your company name, logo and sequential numbers can be hot stamped onto the Dolav for easy identification.

Technical Data

ECOLINE 485

ECOLINE 590

ECOLINE 650

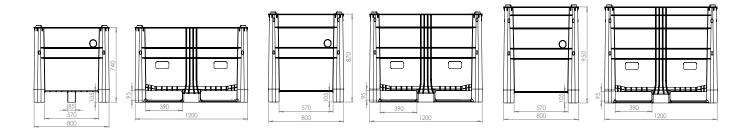

	ECOLINE 485		ECOLINE 590		ECOLINE 650	
External dimensions (LxWxH) mm	1200x800x740		1200x800x870		1200x800x950	
Internal dimensions (LxWxH) mm	1120x720x606		1120x720x736		1120x720x816	
Volume (liter)	485		590		652	
Tare weight for solid type (kg)	27		31		32	
Tare weight for perforated type (kg)	26		30		31	
Max load (kg)	350		350		350	
Max stack load (kg)	1050		1050		1050	
Max load (kg) (box pallet with stackable wheels)	150		150		150	
Max stacking load (kg) (box pallet with stackable wheels)	450		450		450	
Max. load with centre leg (kg) (No Stacking)	600		600		600	
Raw material	HDPE Structural Foam					
Temperature Range	-40°C up to +60°C					
Туре	Perforated / Solid / Combination					
Quantity in container (units)	20ft	40ft	20ft	40ft	20ft	40ft
	39	90	25	74	25	69

 \bullet Dimensions may vary by $\pm1\%$

Data refers to temperature of 23°C

• The load on the stackable wheels option refer to smooth surface only.

DOLAU®

Dolav Plastic Products, Kibbutz Dvir M.P. HaNegev 8533000 [®] 972-72-2450700 [®] 972-8-9918710 [™] dolav@dolav.com [⊕] www.dolav.com Worldwide offices: Belgium, China, France, Germany, Hong Kong, Ireland, Israel, Italy, Russia, Spain, The Netherlands, UK, USA



• Tare weight tolerance is ±1.5Kg

• For other loads that exceed the

recommendations, please contact us.

Tried. Trusted. Best.